


M118ZG36X10IRPF

Imager Size	イメージャーサイズ	1/1.8"	
Mount Type	マウント	C	
Focal Length	焦点距離	10 ~ 360 mm	
F Number	Fナンバー	Fw / 1.6 ~ Ft / 3.6	
Aperture Range	絞り範囲	F/1.6 ~ F/16	
Zoom Ratio	ズーム比	36x	
Field of View Angle (Horizontal x Vertical) 画角(水平×垂直)	1/1.8"	Wide	39.6°×29.7°
		Tele	1.15°×0.84°
	1/2"	Wide	35.5°×27.0°
		Tele	1.02°×0.76°
	1/3"	Wide	27.0°×20.4°
		Tele	0.76°×0.57°
Focus Range	フォーカス範囲	6.0 m ~ ∞	
Operation 操作方法	Focus	フォーカス	Motorized (Preset Potentiometer) 電動 (プリセット機能付)
	Zoom	ズーム	Motorized (Preset Potentiometer) 電動 (プリセット機能付)
	IRIS	アイリス	DC Auto IRIS DCオートアイリス
Filter Size	フィルターネジ径	M110 P=1.0	
Back Focal Distance	バックフォーカス	15.21 mm	
Input Power 入力電圧	Focus	フォーカス	DC 8 ~ 12 V
	Zoom	ズーム	DC 8 ~ 12 V
Wave Length	対応波長	Visible Light~Near Infrared 可視光域~近赤外域	
IRIS Operating Voltage	アイリス作動電圧	OPEN : ~4.0V CLOSE : 0.5V~	
DeFog	DeFog	○ (DC 3 ~ 12 V)	
Weight	質量	5 kg	
Operating Temperature	動作温度範囲	-10°C ~ +60°C	

Drawaing

外観図面

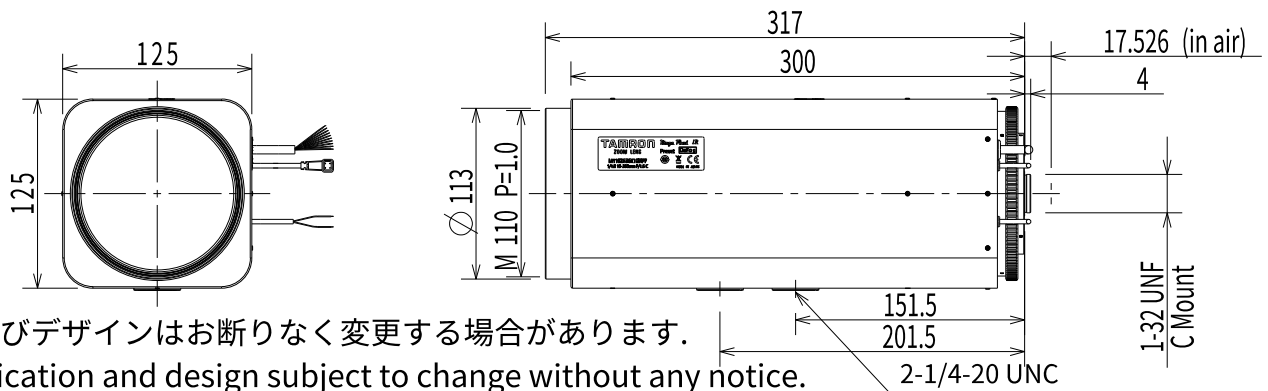


M118ZG36X10IRPF

Remarks

備考

IRIS control

Square 4pin
(JEITA standard)
角4Pコネクタ

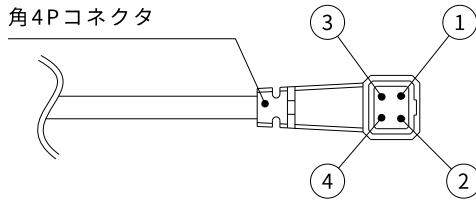

Pin	Coil Function 巻線
1	Damp(-) 制動-
2	Damp(+) 制動+
3	Drive(+) 駆動+
4	Drive(-) 駆動-

Zoom lens wiring diagram

		Wire color	For +/- power supply
Control	Zoom	Red	+Vcc Wide
		Gray	+Vcc Tele
	Focus	Yellow	+Vcc Near
		Blue	+Vcc Far
Preset (2 potentiometers)	Zoom	Green	+Vcc
		Purple	Wiper
		Black	Ground
	Focus	Orange	+Vcc
		White	Wiper
		Sky Blue	Ground

DeFog control

No.	Wire color	
1	Yellow	+Vcc Filter Off (DC3~12V)
2	Brown	+Vcc Filter On (DC3~12V)

※仕様及びデザインはお断りなく変更する場合があります。

Specification and design subject to change without any notice.